



Basic socket series designation for :
Series WN460

Meets the requirements of:
MIL-DTL-12883


SOLDER CUP FOR 20AWG WIRE SIZE

BOTTOM MOUNTING
MONTAGE SOUS STRUCTURE
HRCC-1JV2

TOP MOUNTING
MONTAGE SUR STRUCTURE
HRCC-2JV2



PANEL THICKNESS : 1.6mm

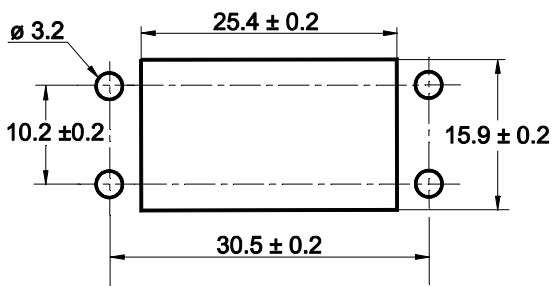

GENERAL CHARACTERISTICS
CARACTERISTIQUES GENERALES

Dimensions in mm
Tolerances, unless otherwise specified, $\pm 0.12\text{mm}$

Supplied with mounting hardware / Fourni avec visserie	
Temperature range / Température d'utilisation	-65° C to +125° C.
Weight / Masse	66g max.
Dielectric Strength at sea level / Rigidité diélectrique au niveau de la mer	1500 Vrms / 50 Hz Minimum
Gold plated contact per MIL-G-45204 / Contact broche dorées selon MIL-G-45204	
Dallyl phthalate, glass-fiber filled per MIL-M-14	

AMERICAS.

Tel: +1 714-736-7599
<http://www.esterline.com/powersystems>

EUROPE.

Tel: +33 3 87 97 31 01
Fax: +33 3 87 97 96 86

ASIA

Tel: +852 2 191 3830
Fax: +852 2 389 5803