





Basic socket series designation for:

Series K, TDH, VS

NOT qualified but designed to the standards and requirements of:


MIL-DLT-12883/40

SOCKET DRAWING

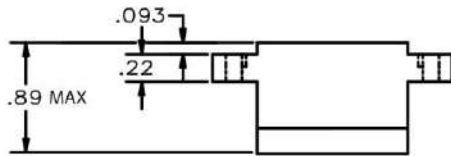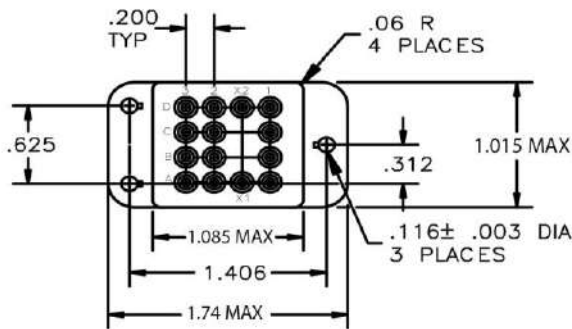


HARDWARE MOUNTING

MOUNTING DETAIL 3 PLACES

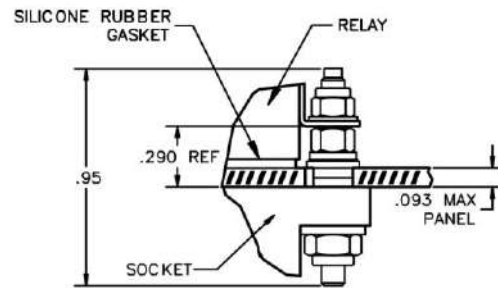

MOUNTING DIMENSIONS

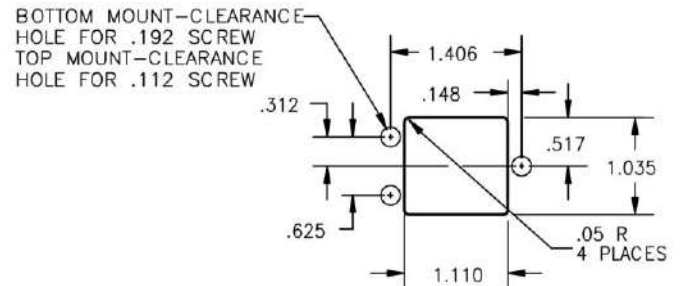

GENERAL CHARACTERISTICS

| | |
|--|-----------------------|
| 1. Supplied with mounting hardware, No. 16 contacts, No. 16 crimp (SO-1048-8308); No. 16 contacts, No. 20 crimp (SO-1048-8518) | |
| 2. Standard tolerances | .xx ± .01; xxx ± .005 |
| 3. Weight | .115 lbs. max |
| 4. Temperature range | -70° C to +125° C |

AMERICAS.

Tel: +1 714-736-7599

<http://www.esterline.com/powersystems>

EUROPE.

Tel: +33 3 87 97 31 01

Fax: +33 3 87 97 96 86

ASIA

Tel: +852 2 191 3830

Fax: +852 2 389 5803