




Basic socket series designation for:

Series Y



NOT qualified but designed to the standards and requirements of::

MIL-DTL-12883

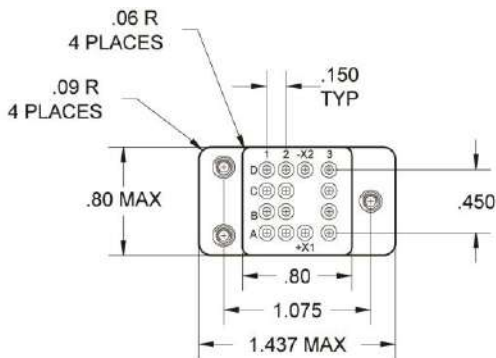


HARDWARE MOUNTING

MOUNTING DETAIL 3 PLACES

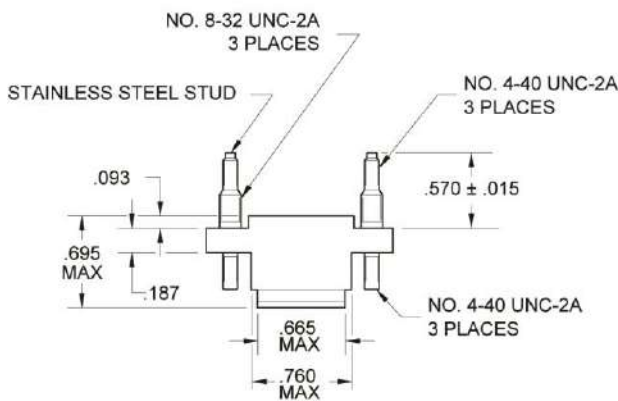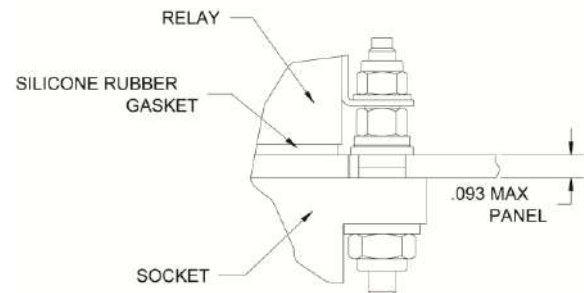

MOUNTING DIMENSIONS

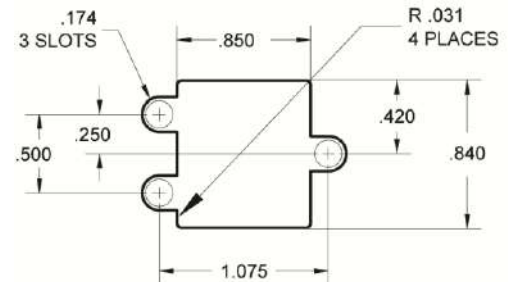

GENERAL CHARACTERISTICS

1. Supplied with mounting hardware No. 16 contacts, and No. 16 crimp for power terminals; No. 20 contacts, No. 20 crimp for coil terminals.	
2. Standard tolerances	.xx ±.01; xxx ± .005
3. Weight	.052 lbs. max
4. Special track and module available. Please consult factory, See SM-1002-003.	
5. Operating temperature	-70° C to +125° C

AMERICAS.

Tel: +1 714-736-7599

<http://www.esterline.com/powersystems>

EUROPE.

Tel: +33 3 87 97 31 01

Fax: +33 3 87 97 96 86

ASIA

Tel: +852 2 191 3830

Fax: +852 2 389 5803

1 / 1