




Basic socket series designation for:

Series KA, CS400

NOT qualified but meets the requirements of:



MIL-DTL-12883

SOCKET DRAWING

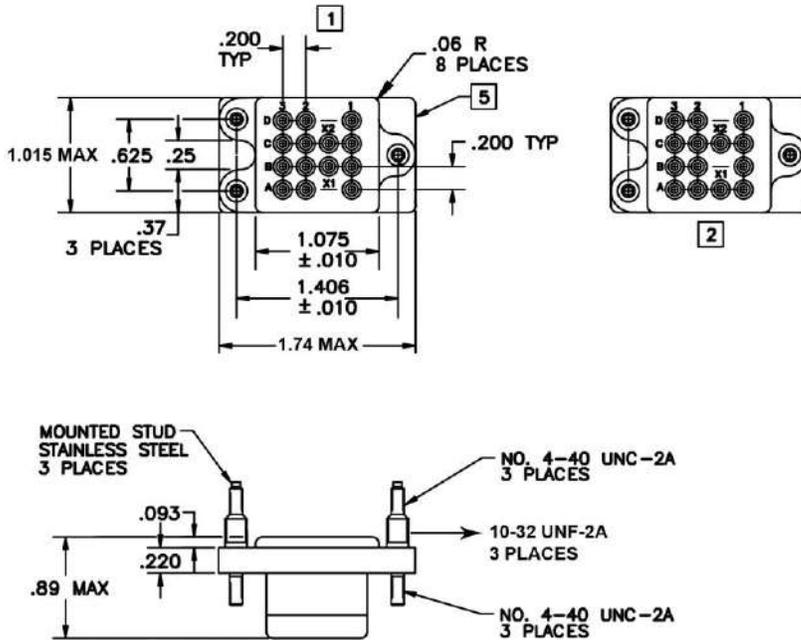

HARDWARE MOUNTING

MOUNTING DETAIL 3 PLACES

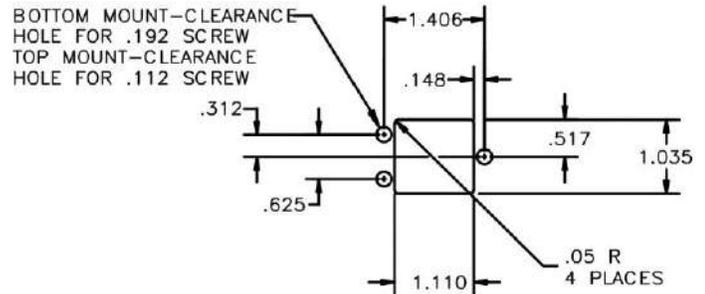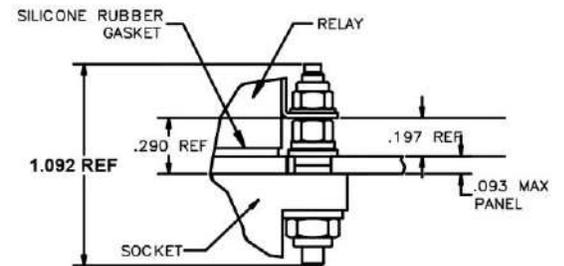

MOUNTING DIMENSIONS

GENERAL CHARACTERISTICS

1. Supplied with mounting hardware, No. 16 contacts, No. 16 crimp for coil 115 Vac, rear release (SO-1048-8776)	
2. Supplied with mounting hardware No. 16 contacts, and No. 16 crimp for coil 28 Vac, rear release (SO-1048-8779)	
3. Standard tolerances	.xx ± .01; xxx ± .005
4. Weight	.132 lbs. max
5. Shape optional	
6. Temperature range	-70° C to +125° C

AMERICAS.

Tel: +1 714-736-7599

<http://www.esterline.com/powersystems>

EUROPE.

Tel: +33 3 87 97 31 01

Fax: +33 3 87 97 96 86

ASIA

Tel: +852 2 191 3830

Fax: +852 2 389 5803